



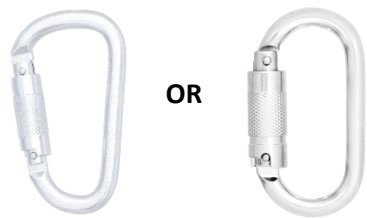

KS 6000

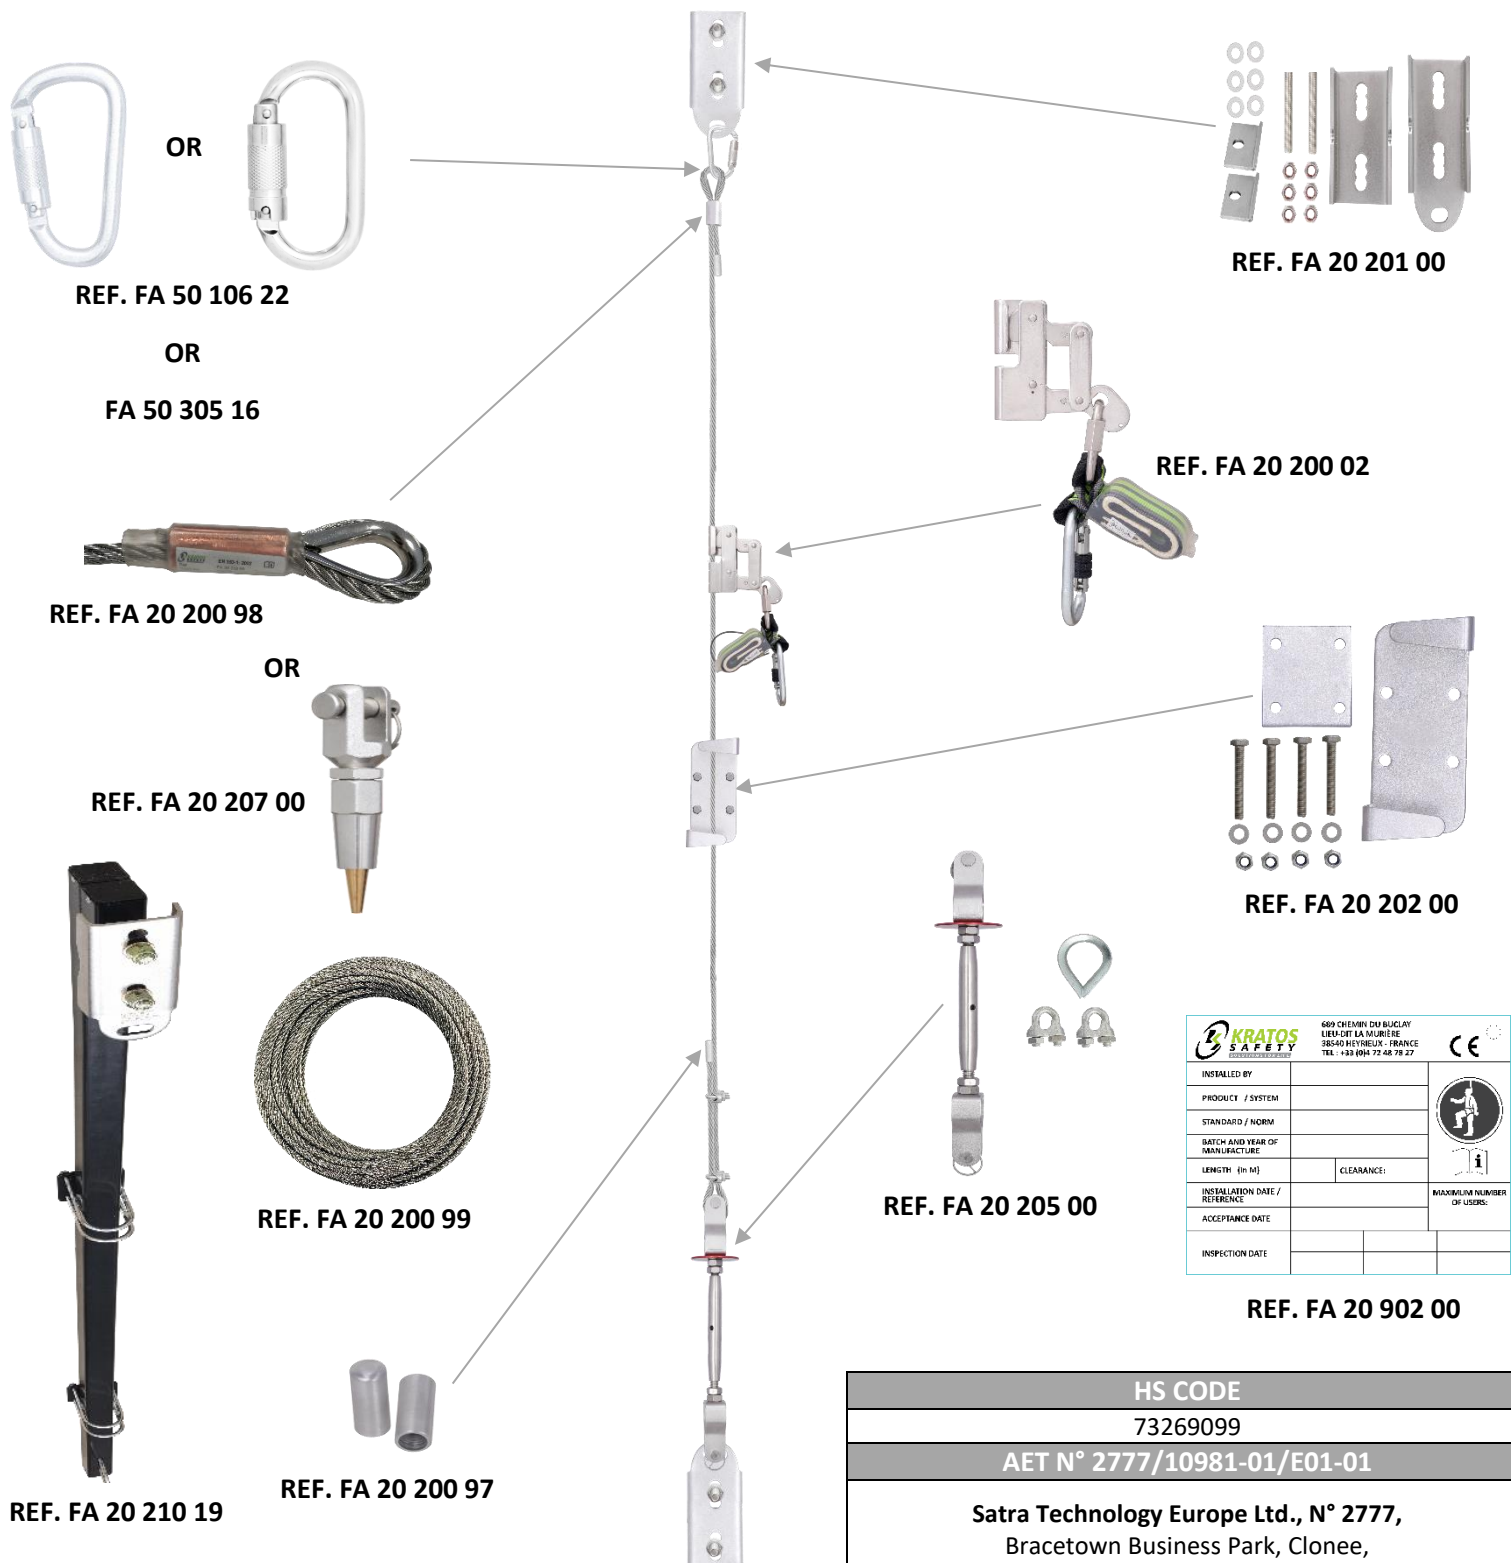

OR

REF. FA 50 106 22

OR

FA 50 305 16



REF. FA 20 200 98

OR



REF. FA 20 207 00




REF. FA 20 210 19



REF. FA 20 200 99



REF. FA 20 200 97



REF. FA 20 201 00



REF. FA 20 200 02



REF. FA 20 202 00





REF. FA 20 205 00

		609 CHEMIN DU BUCLAY LIEU-DIT LA MURIÈRE 38540 HEYRIEUX - FRANCE TEL. +33 (0)4 72 48 78 27		
INSTALLED BY				MAXIMUM NUMBER OF USERS:
PRODUCT / SYSTEM				
STANDARD / NORM				
BATCH AND YEAR OF MANUFACTURE				
LENGTH (in M)		CLEARANCE:		
INSTALLATION DATE / REFERENCE				
ACCEPTANCE DATE				
INSPECTION DATE				

REF. FA 20 902 00

HS CODE
73269099
AET N° 2777/10981-01/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland



REF.	KS 6000
LG.  KG	---
CE	EN 353-1
MAT.	
R (kN)	15 kN



Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers

R(kN)

Résistance (en kN)
 Resistance (kN)
Resistencia (en kN)
 Resistenza
Belastbarkeit (in kN)